


AIRMATE

SUBMITTAL DRAWING

- ALL EXTRUDED ALUMINUM CONSTRUCTION
- HEAVY CROSS BRACING REINFORCEMENT FOR FLOOR USE
- DUAL DIRECTION MULTI-SHUTTER VALVE FOR ADJUSTABLE AIR PATTERN
- NYLON SLIDE VALVE OPERATORS
- BLADE SPACING ON 1/2 INCH CENTERS WITH 5/16 INCH OPENING BETWEEN BLADES
- FINISH: SATIN ANODIZED (SA)

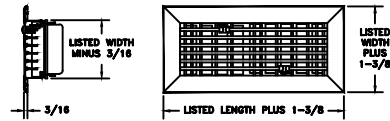

LISTED SIZE
W X L
2-7/16 X 10
2-7/16 X 12
2-7/16 X 14
4 X 10
4 X 12
4 X 14
6 X 10
6 X 12
6 X 14

MEETS LOAD TEST REQUIREMENTS OF THE INTERNATIONAL MECHANICAL CODE SECTION 605.18.1 AND I.U.D. 3280.715(e)(2)

JOE HARRIS	DESIGNED BY	DATE 09/17/2021
ARCHITECT		E315M
ENGINEER		Extruded Floor Diffuser
CONTRACTOR		