

AIRMATE

SUBMITTAL DRAWING

- STEEL FACE AND DAMPER CONSTRUCTION, BLADES ARE ALUMINUM.
- *SCREW DRIVER OPERATED OPPOSED BLADE DAMPER
- INDIVIDUALLY ADJUSTABLE BLADES, 13/16" FIN SPACING
- *FINISH: BRIGHT WHITE OR PAINTED ALUMINUM

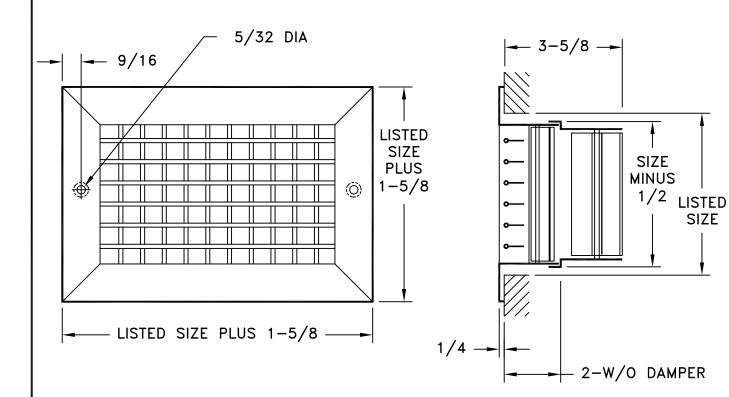

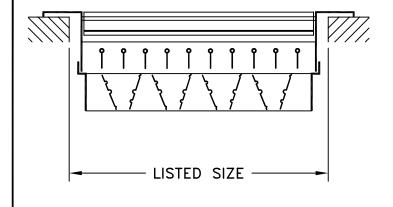

MODELS AVAILABLE

- ☐ 240V/240VO
- ☐ 240H/240HO

JOB NAME: _______ SUBMITTED BY: DATE: 08/12/2014 AM-240V/240H

LOCATION: _______ ARCHITECT: ______ Double Deflection Register With Optional Opposed Blade Damper

CONTRACTOR: _______